

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.


Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problems Mailbox.**

**This Page Blank (uspto)**



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 104 964 A1**

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
06.06.2001 Bulletin 2001/23

(51) Int. Cl.<sup>7</sup>: **H04L 12/58**, **H04M 3/533**,  
**G06F 17/60**

(21) Application number: **99124149.8**

(22) Date of filing: **02.12.1999**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU**  
**MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

• **Kovacs, Ernő, Sony Int.(Europe) GmbH**  
**70736 Fellbach (DE)**

(71) Applicant: **Sony International (Europe) GmbH**  
**50829 Köln (DE)**


(74) Representative: **Rupp, Christian, Dipl.Phys. et al**  
**Mitscherlich & Partner**  
**Patent- und Rechtsanwälte**  
**Sonnenstrasse 33**  
**80331 München (DE)**

(72) Inventors:  
• **Mache, Niels, Sony Int.(Europe) GmbH**  
**70736 Fellbach (DE)**

### (54) Instant messaging

(57) The present invention relates to a system that enables the nearly real-time transmission of messages originated and received from/by heterogeneous communication networks. The purpose of instant messaging is to transmit high priority messages in (nearly) real-time between clients (man and machine). Unified messaging merges analog and digital transmitted messages such as facsimile, voice mail, e-mail, WWW and the cell phone short message service (GSM/SMS) to unified instant messages. A Unified Instant Messaging System (UIMS) consists of four major components: distributed

gateways, message brokers, message processors and a client directory database. Messages of arbitrary form can be translated into Unified Instant Messages (UIM) by Instant Message Gateways (IMGateways). Instant Message Brokers (IMBrokers) control the message flow and further message processing. IMBrokers also ensure message authenticity and security. Further processing steps on an instant message can be performed anywhere in the IP network by Instant Message Processors (IMP) provided by Instant Message Service Providers (IMSP).

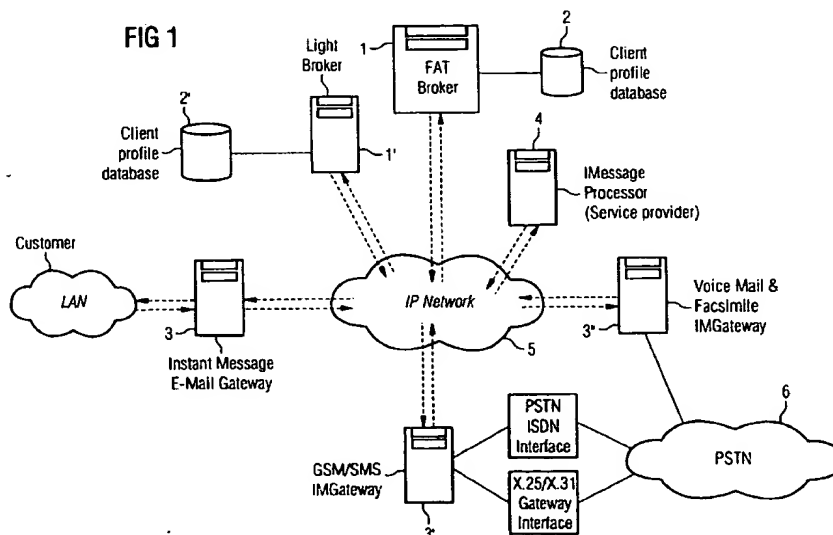

## Description

[0001] The present invention relates to a system for transmitting messages over a multimedia network from a transmitting client to a target client, to a message broker unit for a distributed multimedia system, to a method for sending messages over a multimedia network from a sending client to a target client as well as to a software program product for implementing such a method in a computer network.

[0002] The present invention generally relates to the field of electronic messaging. Electronic messages in the form of e-mails or GSM short message texts are known. They rely on a store-and-forward technique where the originator of the message sends the message to a computer node. In the node the message is stored and then forwarded to other nodes until it reaches a mailbox belonging to the intended user.

[0003] Also known from prior art are dedicated gateways for transferring a message from one transfer medium (e.g. SMS) to another transfer medium (e.g. fax). Several GSM network operators and independent service providers offer functionality like this. The major disadvantage of such systems is that there are targeted at a fixed transfer task, so is from one well-defined medium into another.

[0004] Another means known from prior art is the use of inexpensive intermediate networks for transmitting messages between different locations. For example, one could send a document as an attachment of a e-mail. This combined message is sent to dedicated gateway where it is converted to fax and transmitted to the intended recipient.

[0005] From US-A-5,608,786 an unified messaging system is known. This known technique makes use of existing communication channels or networks. Part of the system relies on a data communication network forming an intermediate leg of the distribution network. Telephone communication is typically used for initial or final legs. Voice mail, E-mail, facsimiles and other message types can be received by the system for retrieval by the subscriber. Communications may be centralised and retrieval of messages can be accomplished using one of a number of separate and distinct approaches. Thus, data communication networks such as the internet can become global voice mail and facsimile mail systems.

[0006] In view of the above-captioned prior art it is the object of the present invention to provide for a technique capable of unified (multimedia) instant messaging. With other words, the invention should provide a technique for the nearly real-time transfer of multimedia messages and a processing of these messages through a flexible distributed system.

[0007] The above object is achieved by means of the features of the independent claims. The dependent claims develop further the central idea of the present invention.

[0008] According to the present invention therefore a system for transmitting messages over a multimedia network from a sending client to a target client is provided. The messages comprise respectively target client information. The system comprises a plurality of distributed message gateways, each message gateway being configured for the receipt and/or transmission over at least one dedicated transfer medium. A message broker is connected to the message gateways, wherein the message broker is provided with a client database.

[0009] A first message gateway receives a message from a sending client over a first transfer medium and transmits the message or an information extracted thereof to the message broker. The message broker automatically selects an appropriate second transfer medium depending on the content of the client database and the message or the information supplied by the first message gateway. The message is then sent to the target client by means of a second message gateway configured for a transmission over the second transfer medium selected by the message broker.

[0010] The system can comprise a common internal message format for the communication respectively between the message broker and the message gateways.

[0011] The message gateways can be distributed over the network.

[0012] The transfer media can comprise analog and digital transfer media.

[0013] At least one message processor can be provided between the first and the second message gateway for further processing the content of the message to be transmitted.

[0014] The client database can comprise addresses of clients, client preferences and/or characteristics of the transfer network to the corresponding target client.

[0015] The message broker can be designed to furthermore perform processing control and/or security processing.

[0016] The message broker can be designed to furthermore perform accounting and/or billing.

[0017] A plurality of message brokers can be provided.

[0018] At least one message broker can be connected to the client database with reduced capacity.

[0019] According to another aspect of the present invention a message broker unit for a distributed multimedia system is provided. The message broker is designed to autonomously select an appropriate transfer medium out of a plurality of transfer media for messages received from a sending client and to be transferred to a target client. The message broker is connected to a client database and the transfer medium selection is performed depending on target client information and the content of the client database.

[0020] The transfer medium selection can be performed depending on the target network, the message type and/or client preferences contained in the client database.

**[0021]** According to the present invention furthermore a message for sending messages over a multimedia network from a sending client to a target client is provided. The messages comprise target client information. The messages or an information extracted thereof are transmitted from the sending client to a message broker over a first transfer medium. The messages are transmitted to a target client over a second transfer medium, wherein the second transfer medium can be identical to the first transfer medium. The message broker autonomously selects an appropriate second transfer medium out of a plurality of transfer media depending on the content of a client database connected to the message broker and depending on the message or the information extracted thereof (e.g. target client information).

**[0022]** The transmission of the message from the sending client to the target client can be performed essentially in real time.

**[0023]** A conversion from the first transfer medium to the second transfer medium can be performed depending on the target network, the message type and/or client preferences contained in the client database.

**[0024]** Before the transmission to the target client, the content of the message can be further processed by digital signing, encrypting, watermarking and/or language translation.

**[0025]** A life time can be attributed to each message and the message therefore is only transmitted to the target client until the expiration of the life time.

**[0026]** According to another aspect of the present invention a software program product is provided implementing, when loaded into a memory of a computer, a method as set forth above.

**[0027]** In the following further features, objects and advantages of the present invention will become evident for the man skilled in the art by means of a detailed description of embodiments of the invention taken in conjunction with the figures of the enclosed drawings.

Figure 1 shows an example of an unified instant messaging system according to the present invention,

Figure 2 shows the principle communication structure of the unified instant messaging system,

Figure 3 shows the internal structure of an instant message broker,

Figure 4 shows the internal structure of an instant message gateway,

Figure 5 shows the data path for an example of an unified instant message, and

Figure 6 shows an example for an authentication example, i.e. a client cellular phone registration.

**[0028]** The present invention relates to a system that enables the nearly real-time transmission of messages originated from and received by heterogeneous communication networks. The purpose of instant messaging is to transmit high priority messages in (nearly) real-time between clients (man and machine). Such an unified messaging merges analog and digital transmitted messages such as facsimile, voice mail, e-mail, WWW and the cell phone short message service (GSM/SMS) to unified instant messages. A Unified Instant-Messaging System (UIMS) consists of four major components:

- distributed gateways,
- message brokers,
- message processors, and
- a client directory database.

**[0029]** Messages of arbitrary form can be translated into Unified Instant Messages (UIM) by Instant Message Gateways (IMGateways). Instant Message Brokers (IMBrokers) control the message flow and further message processing. IMBrokers also ensure message authenticity and security. Further processing steps on an instant message can be performed anywhere in the IP network by Instant Message Processors (IMP) provided by Instant Message Service Providers (IMSP).

**[0030]** The UIMS has the following properties:

a) The system is scalable in a way that the message transmission and conversion capacity can be incrementally increased by extension of gateways, brokers and message processors.

b) IMGateways converts messages of arbitrary protocol and format (e.g. fax, voice mail, GSM Short Message Service, GPRS, e-mail, WWW) into unified instant messages that are transmitted over TCP/IP in (nearly) real-time between IMGateways under IMBrokers control.

c) IMBrokers manage sender/receiver address conversion, user groups, private user profiles, private user data (e.g. telephone books, calendars, notebooks) and message routing, security, accounting and storage.

d) Instant Message Processors enable message translation or conversion and value added services. The account information of the Instant Message Service offered by the ISMP is usually under control of IMBrokers provided by the UIMS carrier.

**[0031]** Figure 1 shows an example of an Unified Instant Messaging System (UIMS). The system consists of Instant Message Brokers 1, 1', Gateways 3, 3', 3" for e-mail, GSM/SMS, facsimile and voice mail, and an Instant Message Processor 4. The units of the Instant Messaging System communicate with each other over

an IP network 5. The instant message broker 1 manages the system configuration and state, user profiles, message routing and services, accounting and security. "Light" and "fat" message 1, 1' brokers differ in such a way that light brokers contain a limited number of user profiles (reduced capacity) in comparison with fat message brokers. Respectively a client profile database 2, 2' is connected with each message broker 1, 1'.

[0032] Figure 2 shows the principle communication structure of the unified instant messaging system consisting of three major components: distributed gateways 3, message brokers 1 and a client directory profile database 2. The properties of the messaging system are:

1. The system is fully scalable. The message transmission capacity can be incrementally increased by extension with additional gateways, message brokers and distributed client databases.

2. Gateways converts arbitrary messages (GSM/SMS, e-mail, fax, WWW) into unified instant messages which are seamlessly transmitted in (nearly) real-time between message brokers and gateways over TCP/IP.

3. Message brokers manage client address conversion, user profile handling, message routing, security and accounting.

[0033] Instant message gateways and brokers communicate over TCP/IP and may be located anywhere in the Internet. In respect to security and performance, however, the message broker has direct access to the client dictionary.

[0034] Figure 3 shows the Instant Message Broker (IMB) internals. The internal units of the instant message broker 1 administer user profiles, manages accounting, billing, authentication and security. A configuration unit dynamically traces the state and the properties of gateways, message processors and partner brokers. Dependent on message type, originator and sender location, user profiles and available resources the instant message required conversion is determined and the instant message is routed from the originator gateway to the destination gateway.

[0035] Figure 4 shows the internal structure (example) of an Instant Message Gateway (IMGateway). An IMGateway may have multiple access driver units, such as GSM/SMS, e-mail, facsimile, WWW. The access driver units communicate with the gateway control over an access driver interface layer. A dynamic configuration unit traces the state and configuration of the gateway with its access drivers. The state configuration is periodically transmitted to the message brokers that manage the state and properties of the UIMS. The gateway is usually capable to receive and send instant messages (bi-directional). Furthermore the gateway can extract information from the message.

[0036] Incoming messages (from outside of the IP network 5) are converted into the unified messaging format. Then the message and/or an information extracted thereof is sent to the message broker and so on. Incoming instant messages (the gateway works as a receiver gateway) are converted into the target format and sent out (e.g. over PSTN). In this case the IMGateway returns a delivery acknowledgement.

[0037] Fig. 5 shows an unified instant message originated in Japan as an e-mail, transmitted over the Internet 5 and received from a cellular phone 9 located in Germany.

[0038] Figure 6 shows an authentication example, i.e. client cellular phone registration. On a higher level, a WWW based example of a user authentication is shown below. In principle authentication of the client can be ensured by using session keys in combination with two-way communication (for example WWW and GSM/SMS).

## System Description

[0039] As has been already said the system consists of four basic processing units: the message gateway unit 3 (IMGateway), the message broker units (IMBroker) 1, the message processors 4 (IMProcessor), and the client database 2. The system might contain several instances of each of these units. Units might be located together on one computing node or might be distributed over several computing nodes connected by the network 5. Messages are processed by this network 5 of units either by following a pre-defined processing path or by dynamically determining the path to take through the different units. In the later case, the current network configuration i.e. the available gateways, gateway interfaces and message processors is determined by status information that is periodically broadcast, between gateways, processors and message brokers. The instant message transfer and processing manages IMBrokers according to user preferences (kept in client databases 2) and current network configuration.

## Definition of unified instant messaging (UIM):

[0040] A unified instant message is characterized through

- Message delivery in nearly real-time
- a unique message structure and presentation, flexible to present any type of messages
- a limited message validity or lifetime (inside the message system)
- message generation and processing by man and machine.

[0041] The unified instant message structure might contain the following components (not limited to):



- **Serial number**

The serial number of the message, generated by a secure random number generator. The suggested length is currently 160 bit.

- **Authentication keys**

A number of message digests that provides message authentication (here Keyed-Hashing for Message Authentication, HMAC).

- **Public keys**

This field contains a number of public keys for message encryption, particularly for the non-granted content of the message.

### Basic units of the unified instant message system

[0042] As described above, a UIM system consists of four basic units. In the following details of these units are described.

#### 1. IMGateways

[0043] IMGateways are responsible for receiving and transmitting message between an external network (e.g. PSTN, GSM, other) and the UIM system. A single gateway might contain *access drivers units* for several different means. For example, it could have a ISDN connection to a GSM SMS center and a modem for transmitting a message as a fax. The following list shows examples for access driver units:

- **cellular phone with SMS capability (SMS Cellular Phone Interface)** a access unit using a serial line cable or an infrared connection to a cellular phone with SMS capabilities
- **fixed line connection to a SMS center (SMS Dial In Interface)** fixed line connections like PSTN (modem), ISDN, X.31, X.25, frame relay or any other means to access a core network SMS service center
- **fax machine (Fax Interface)** a connection to a fax machine to transmit messages as a facsimile
- **e-mail system (E-Mail Interface)** an interface to an e-mail system (e.g. POP3 or IMP4) for delivering the message as an e-mail. In this case, the UIM system knows that e-mail systems might have limited real-time capabilities.
- **direct TCP/IP connections (Direct TCP/IP Interface)** a direct TCP/IP connection to users that are currently or permanently online

[0044] The access driver units have usually several functions. They represent the terminating or originating element of a telecommunication connection. Alternative they could be the client (originator) or the server (receiver) part of an Internet connection. Through receiving the message through one access unit and transmitting it

through another access unit, the IMGateway performs protocol conversions between different networks.

[0045] Furthermore, the access drivers convert received messages into the UIM message format, and outgoing messages into the content format supported by the target network. In this way, the IMGateway performs content conversion depending on the network characteristics. Some examples for IMGateway supported content formats are: facsimile, voice mail, GSM Short Message Service, GPRS datagrams, Email, WWW, TCP/IP-based message formats.

[0046] IMGateway have furthermore connections to other units of the UIM system. Usually, this is the Direct TCP/IP Interface, but depending on the UIM system set-up, any other kind of network and related access driver units can be used.

#### 2. Message Processors (Internal Gateways)

[0047] Another unit is the instant message processor (IMP). Sometimes they are called *internal gateways*, as they perform not transport protocol conversions. MPU perform value-added-service for the message processing like language conversion (e.g. german-french), speech processing, bank payment/accounting, digital signing, watermarking, etc.

[0048] Usually IMPs are part of the transfer of an IM from the gateway to the message broker or vice versa. As described above, there might be a pre-defined path through the different units, or the path is determined dynamically by the different units involved or by the IMBroker.

#### 3. Instant Message Broker (IMB)

[0049] The IMB has direct access to a client database unit. He manages lookup address translation, user preferences and other criteria to determine the next processing steps for the instant messages. He selects an appropriated IMGateway unit for transmitting an IM to the client. Further conversion can be carried out by message processors or by the IMGateways.

- Client data administration
- Message and service accounting
- Ensures message authentication, using MIAP (as described)
- Manages message security, dependent on country specific jurisdiction
- Message confidentiality and pay-per-read functionality. This functionality can be realized by secure instant message read count in combination with message encryption and accounting.



#### 4. Client Databases Unit

##### [0050]

- Uses user profiles to maintain user properties and preferences 5
- Maintain private user data, such as calendars, telephone books, notes, etc. 10
- manages message conversion control by using message conversion tables with defined conversion priorities
- Manages message routing and distribution of resource

##### Advantageous Differences 15

[0051] Compare with the known art, the invention allows the following:

- Messages are received and sent out over different communication channels. 20
- The unified instant message system can be dynamically extended to add additional transfer networks, services and capacity. This can be done at runtime. 25
- The system autonomously selects the outgoing transfer medium according to a set of known addresses of the user, a list of user preferences, and the known characteristics of the transfer network. 30
- The system performs media conversion on the messages according to target network, message type and client preferences. 35
- The system might be able to perform additional processing steps on the message like digital signing, encryption, watermarking, language translation or other. 40
- The system might scale to different size by increasing the number of message gateways, processors and brokers. The system extension can be done in a running system. 45
- Message transfer, processing control and security is managed by a relatively small number of message brokers (in comparison to gateways and processors). The structure and communication protocols of the UIMS enable very high message throughput with a minimum broker load. Minimum broker load is ensured because the unified instant message information content is by NOT processed by message brokers. Message brokers controls message flow by inspecting unified instant message meta information instead. Because of the meta information is much more compact as the message itself, a maximum throughput with reduced da-

ta transfer can be guaranteed.

- Arbitrary messages can be personalized (a "for your eyes only" or confidential message) with the intended receiver client. That is that only the receiver is able to read the message. Beyond it, the message is forward protected, i.e. the receiver is not allowed to forward the private message to another client. Of course the message can be copied by cut-and-paste, screen dump or by simply writing it down. But in comparison to a usual messaging system the original message content with the message header (time, date, originator, etc.) can not be forwarded to another client. Message confidentiality and personalization is realized by authentication and optionally encrypting with a receiver key that is valid only for the intended receiver and the given message.
- Instant messages contain a secure read count and a maximum read count. The read count is authenticated together with the message content in such a way that the read count and message content can not be modified by a third party without modification of (at least) one component of the instant message system (instant messaging client, gateway, processor, broker). The maximum read count is intended to be used for copy protection issues and to control the effect of message chain letters (if wanted).
- The originator of an instant message can be hidden. Hiding of the message originator is used for anonymous message creation. The message originator is of course known and authenticated by the instant messaging system (i.e. by the broker). However the broker may change the originator identification to an anonymously (and unique) alias or cipher identification when a message is submitted to a special interest group. This feature is applied when the message originator require to be anonymous, i.e. in auctions, house sales, anonymous partner search. The anonymous originator of a message can be reached (e.g. to reply his message) only by his (unique) alias provided by the message broker.

#### Claims

1. System for transmitting messages over a multimedia network from a sending client to a target client, the messages comprising target client information, the system comprising:
  - a plurality of message gateways (3, 7, 8), each message gateway (3, 7, 8) being configured for the reception and/or transmission over at least one dedicated transfer medium, and
  - a message broker (1) connected to the message gateways (3, 7, 8) and being provided with

a client database (2),

wherein a first message gateway receives a message from a sending client over a first transfer medium and transmits the message and/or an information extracted thereof to the message broker (1), the message broker (1) automatically selects an appropriate second transfer medium depending on the content of the client database (2) and the supplied message and/or an information extracted thereof, and the message is sent to the target client by means of a second message gateway configured for a transmission over the second transfer medium selected by the message broker (1).

2. System according to claim 1, characterized by a common internal message format for the communication respectively between the message broker (1) and the message gateways.
3. System according to anyone of the preceding claims, characterized in that the message gateways are distributed over the network.
4. System according to anyone of the preceding claims, characterized in that the transfer media comprise analog and digital transfer media.
5. System according to anyone of the preceding claims, characterized by at least one message processor (4) provided between the first and the second message gateway for further processing the content of the message to be transmitted.
6. System according to anyone of the preceding claims, characterized in that the client database (2) comprises addresses of clients, client preferences and/or characteristics of the transfer network to the corresponding target client.
7. System according to anyone to the preceding claims, characterized in that the message broker (1) is designed to furthermore perform processing control and/or security processing.
8. System according to anyone to the preceding claims, characterized in that

the message broker (1) is designed to furthermore perform accounting and/or billing.

9. System according to anyone of the preceding claims, characterized in that a plurality of message brokers (1, 1') is provided
10. System according to claim 9, characterized in that at least one message broker (1') being connected with a client database (2') with reduced capacity.
11. System according to anyone of the preceding claims, characterized in that the messages respectively contain a non-granted encrypted and a granted non-encrypted part.
12. Message broker unit for a distributed multimedia system, characterized in that it is designed to autonomously select an appropriate transfer medium out of a plurality of transfer media for messages received from a sending client and to be transferred to a target client, wherein the message broker (1) is connected to a client database (2) and the transfer medium selection is performed depending on target client information and the content of the client database (2).
13. Message broker unit according to claim 12, characterized in that the transfer medium selection is performed depending on the target network, the message type and/or client preferences contained in the client database.
14. Message broker according to anyone of claims 12 or 13, characterized in that the messages respectively contain a non-granted encrypted and a granted non-encrypted part.
15. Method for sending messages over a multimedia network from a sending client to a target client, the messages comprising target client information, the method comprising the following steps:
  - transmitting the message from the sending client to a message broker (1) over a first transfer medium, and
  - transmitting the message to the target client over a second transfer medium, wherein the second transfer medium can be identical to the first transfer medium,

wherein the message broker (1) selects an appropriate second transfer medium out of a plurality of

transfer media depending on the content of a client database (2) connected to the message broker (1) and the target client information.


16. Method according to claim 15,  
characterized in that  
the transmission of the message from the sending  
client to the target client is performed essentially in  
real-time. 5
17. Method according to claim 15 or 16,  
characterized in that  
a conversion from the first transfer medium to the  
second transfer medium is performed depending on  
the target network, the message type and/or client  
preferences contained in the client database (2). 10
18. Method according to anyone of claims 15 to 17,  
characterized in that  
before the transmission to the target client, the con-  
tent of the message is further processed by digital  
signing, encryption, watermarking and/or language  
translation. 15
19. Method according to anyone of claims 15 to 18,  
characterized in that  
a lifetime is attributed to each message and the  
message is only transmitted until the expiration of  
the lifetime. 20
20. Method according to anyone of claims 15 to 19,  
characterized in that  
the messages respectively contain a non-granted  
encrypted and a granted non-encrypted part. 25
21. Software program product,  
characterized in that  
when loaded into a computer, it implements a meth-  
od according to anyone of claims 15 to 20. 30

40

45

50

55

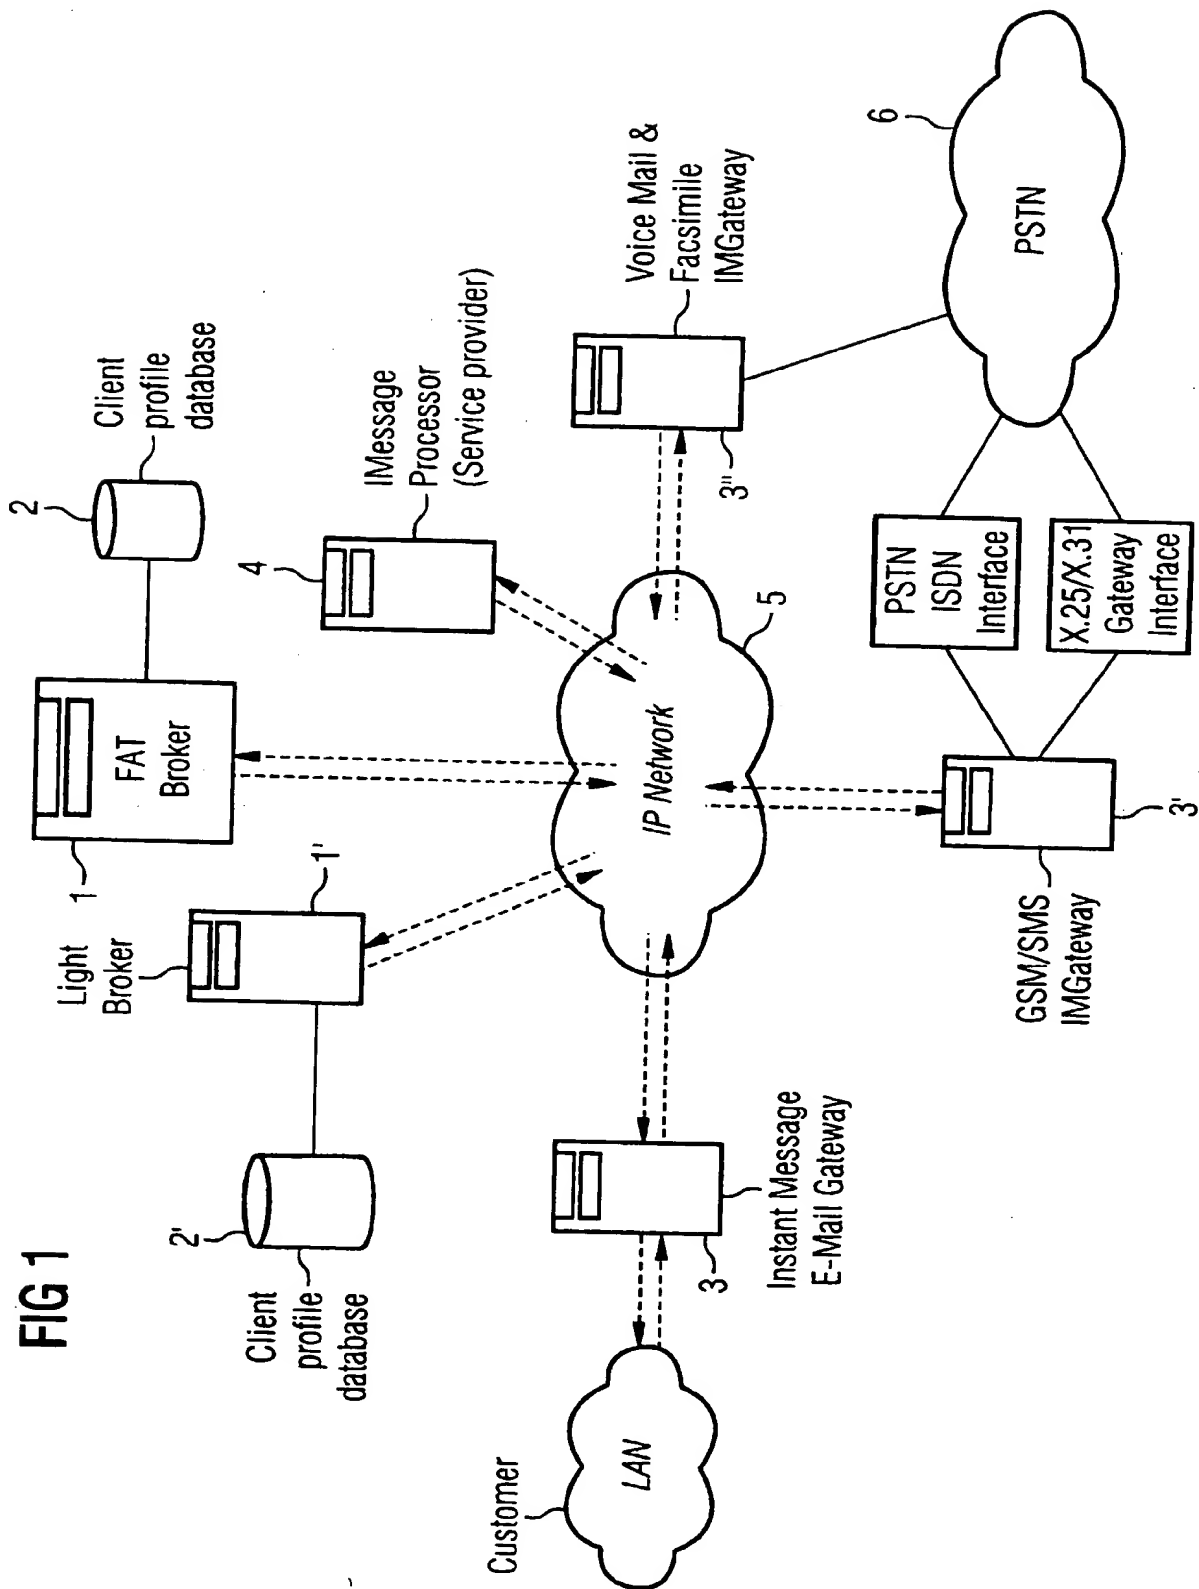

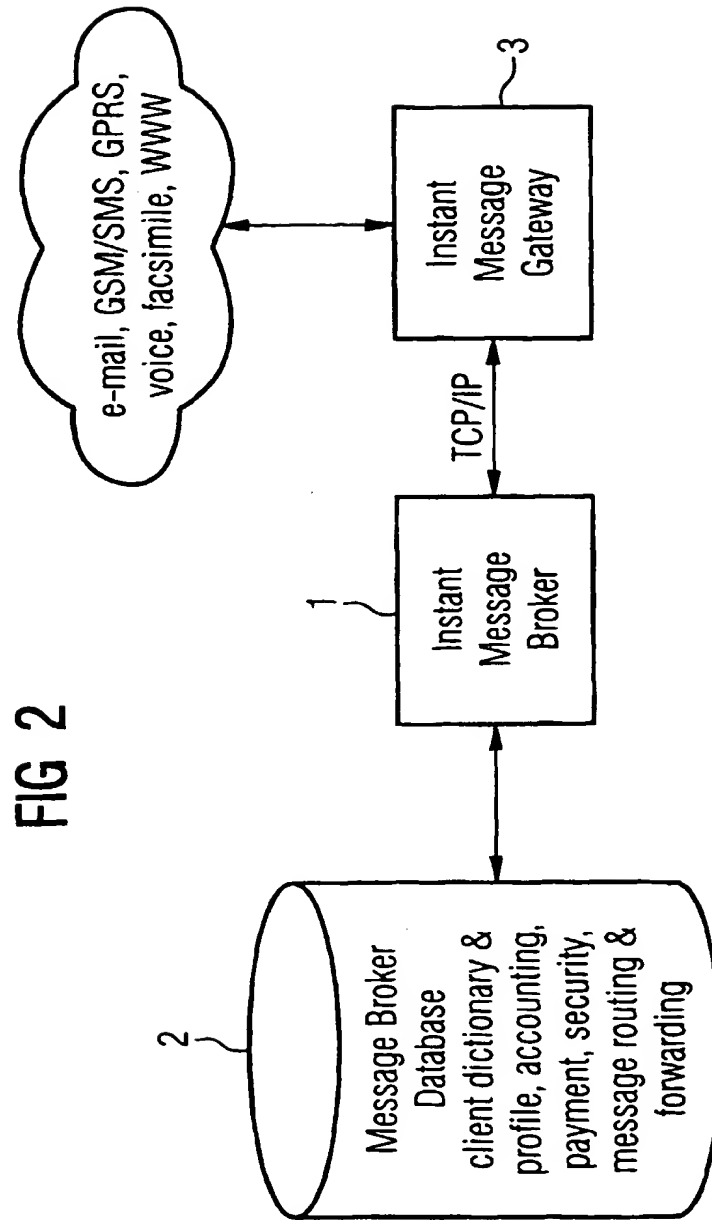


FIG 3

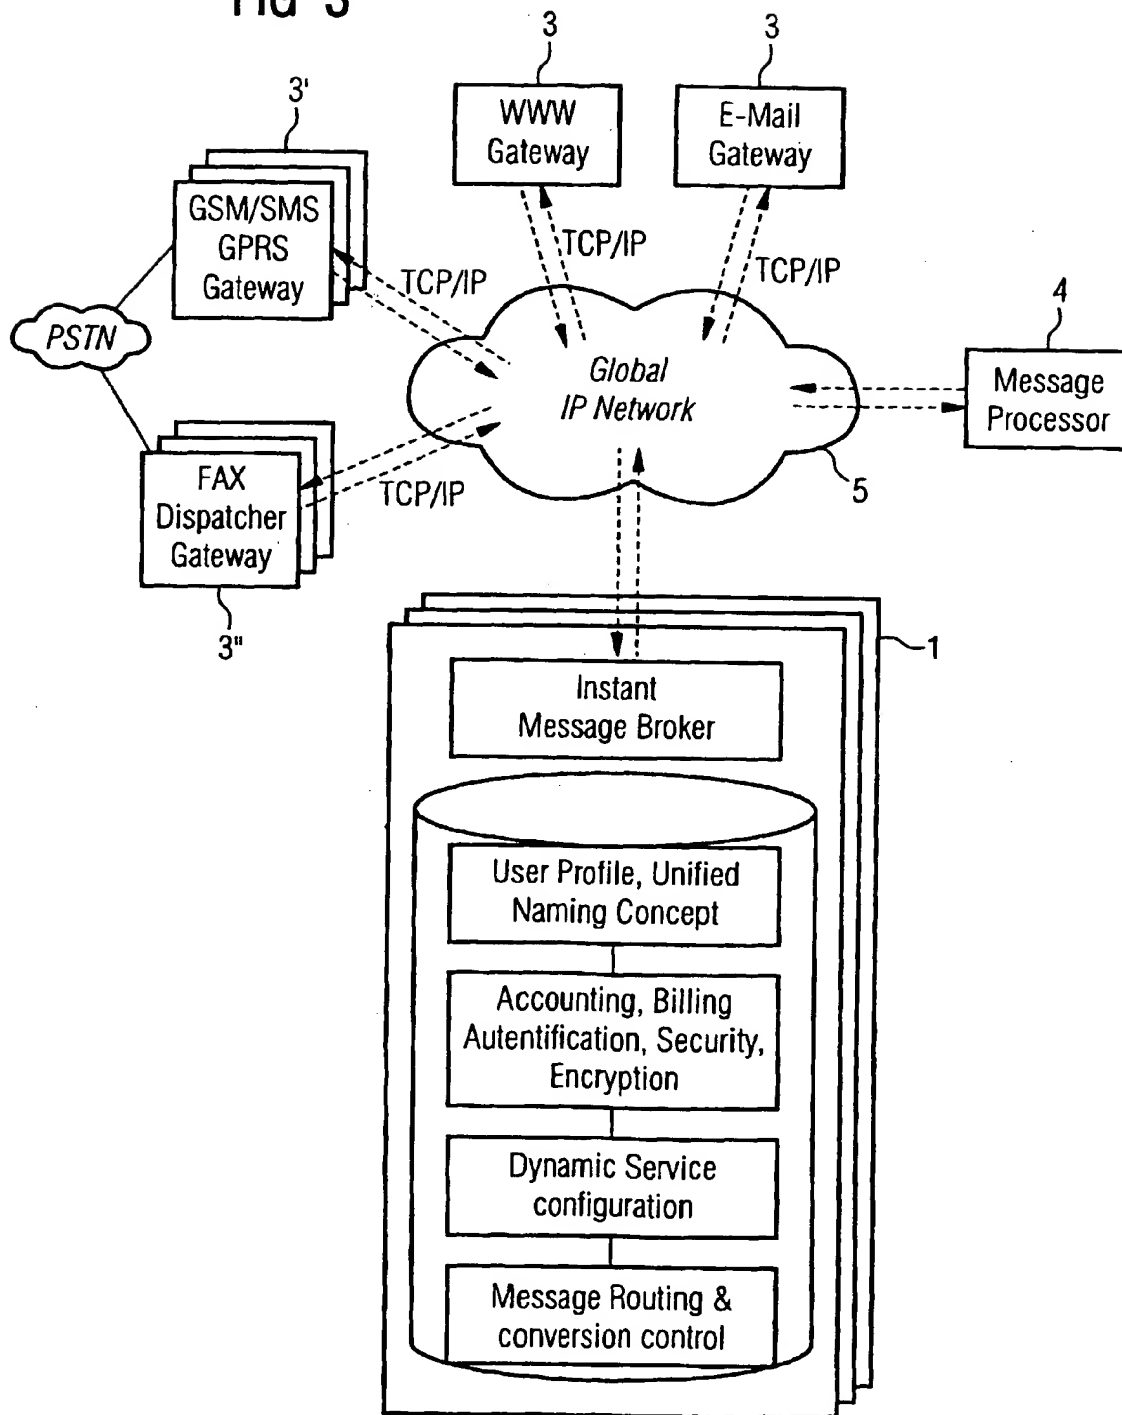


FIG 4


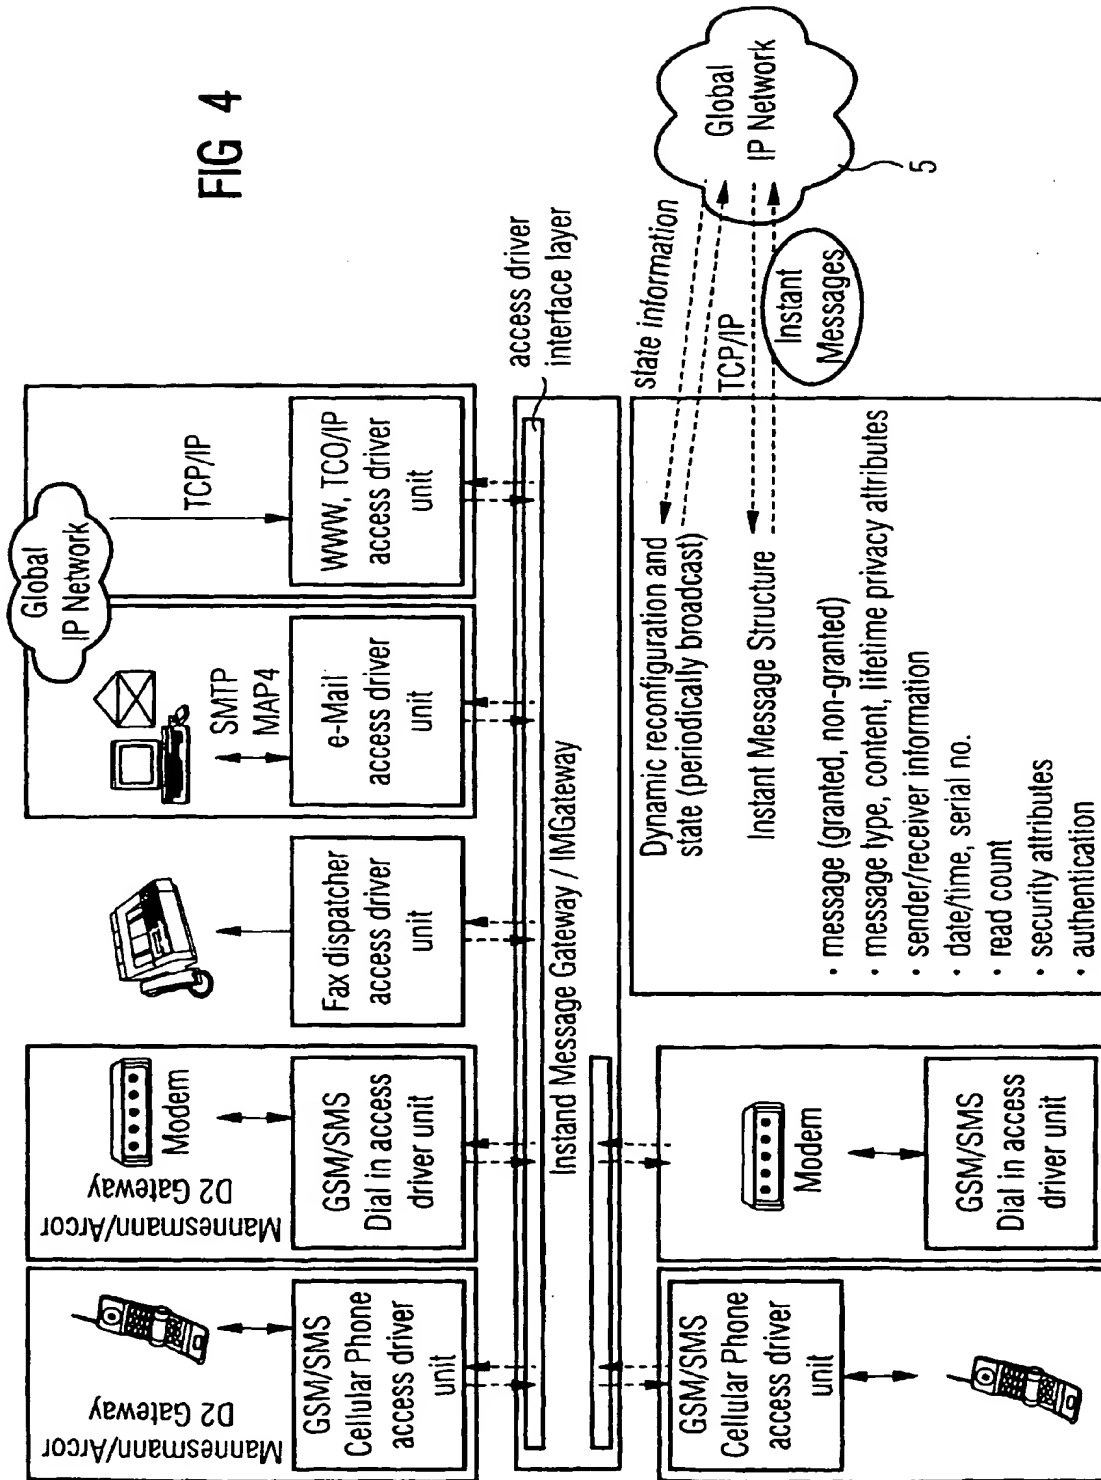


FIG 5



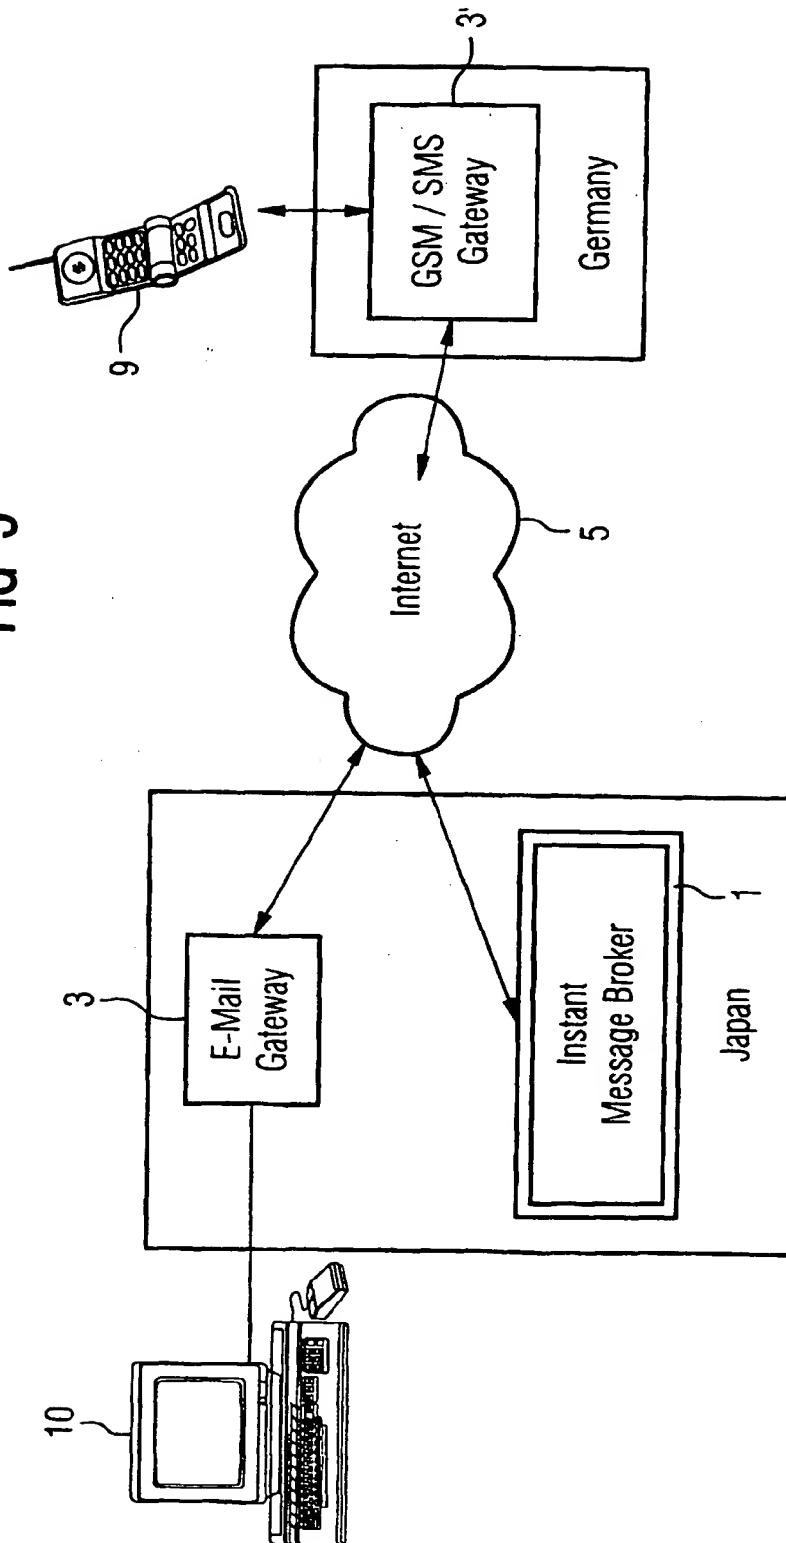

## FIG 6

Step 1: WWW customer center


Wellcome to the Customer Center  
Register GSM/SMS E-Mail Service  
Your phone number:

Step 2: Random generated client  
registration code

Your registration code is  
xy3242  
Please send registration code from  
your phone to the customer center

Step 3: Client registration

Client sends the short  
message "xy3242"  
from client phone to  
the customer center





European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 99 12 4149

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 5 740 230 A (VAUDREUIL GREGORY M) 14 April 1998 (1998-04-14) * abstract * * column 3, line 60 - column 8, line 64 * * column 19, line 49 - column 20, line 53 * * column 21, line 40 - column 22, line 41 * * column 24, line 24 - column 25, line 3 * * column 28, line 61 - column 29, line 41 * * figures 1-3, 11-14 *	1-18, 20, 21	H04L12/58 H04M3/533 G06F17/60
Y	---	19	
Y	US 5 742 905 A (BROCKMAN JAMES JOSEPH ET AL) 21 April 1998 (1998-04-21) * abstract * * column 3, line 10 - line 58 * * column 5, line 56 - column 8, line 30 * * column 19, line 65 - column 20, line 12 * * column 23, line 12 - column 24, line 53 * * column 29, line 26 - column 30, line 13 * * column 36, line 52 - line 59 *	19	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			H04L H04M G06F
A	---	1, 12, 15	
A	US 5 712 901 A (MEERMANS DAVID R) 27 January 1998 (1998-01-27) * abstract * * column 2, line 34 - column 3, line 5 * * column 4, line 8 - column 5, line 2 * * column 5, line 56 - column 6, line 15 * --- -/--	1, 12, 15	
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>18 April 2000</b>	Examiner <b>Poggio, F</b>
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/82 (P4/C01)



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 99 12 4149

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	EP 0 661 878 A (AT & T CORP) 5 July 1995 (1995-07-05) * abstract * * column 2, line 1 - line 26 * * column 3, line 1 - line 43 * * column 6, line 55 - column 8, line 29 * * figure 4 *	1,12,15	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>18 April 2000</b>	Examiner <b>Poggio, F</b>
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03/02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 12 4149

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

18-04-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5740230 A	14-04-1998	NONE	
US 5742905 A	21-04-1998	CA 2199802 A	28-03-1996
		EP 0782805 A	09-07-1997
		JP 9511884 T	25-11-1997
		WO 9609714 A	28-03-1996
		US 5742668 A	21-04-1998
US 5712901 A	27-01-1998	AU 3506197 A	14-01-1998
		CA 2258613 A	31-12-1997
		EP 0906686 A	07-04-1999
		WO 9750228 A	31-12-1997
EP 0661878 A	05-07-1995	AU 8167794 A	06-07-1995
		BR 9405257 A	19-09-1995
		CA 2136040 A	30-06-1995
		CN 1126915 A	17-07-1996
		JP 7212746 A	11-08-1995
		NZ 270276 A	29-01-1997
		SG 45173 A	16-01-1998

EPO FORM P459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82